

All voltage photoelectric sensors

E3JK

- Built-in amplifier accepts wide supply voltage range.
- Slim, space-saving construction measures only 50 x 50 x 17.4 mm.
- Relay outputs with long life expectancy and high switching capacity (3 A, 250 V AC).
- Polarized retroreflective type available for glossy or shiny object detection.



Sensor type	Shape	Connection method	Sensing distance	Output form	Output		Model	
Through-beam		Pre-wired models	5m	Light ON	Relay output		E3JK-5M1	
			Dark ON	E3JK-5M2				
Retroreflective model (with M.S.R. function)			* 2.5m (3m)	Light ON	Relay output		E3JK-R2M1	
			Dark ON	E3JK-R2M2				
				Light ON/Dark ON (selectable)	DC transistor output	NPN	E3JK-R2S3	
						PNP	E3JK-R2R3	
Retroreflective model (without M.S.R. function)			* 4m (5m)	Light ON	Relay output		E3JK-R4M1	
			Dark ON	E3JK-R4M2				
				Light ON/Dark ON (selectable)	DC transistor output (NPN)		E3JK-R4S3	
Diffuse-reflective			300mm	Light ON	Relay output		E3JK-DS30M1	
				Dark ON			E3JK-DS30M2	
					Light ON/Dark ON (selectable)	DC transistor output (NPN)		E3JK-DS30S3

* The value within the parentheses indicates the sensing distance applied when the E39-R2 reflector is used.

Note: The UL-listed model ends with "-US". (Example: E3JK-5M1-US). Note that the DC transistor type of the E3JK is UL-unlisted.

Accessories (Order Separately)

Slits

Slit width	Sensing distance	Minimum sensing object (typical)	Model	Quantity	Remarks
Width 1 mmx20 mm	E3JK-5□□	0.7 m	1 mm dia.	E39-S39	1 pc. each for emitter and receiver (total 2 pcs.) (Seal type long slit) Can be used with the through-beam model E3JK-5□□.

Reflectors

Name	Sensing distance (typical)	Model	Quantity	Remarks
Reflectors	E3JK-R2□□	2.5 m (rated value)	1	Attached to the E3JK-R2□□. Attached to the E3JK-R4□□.
	E3JK-R4□□	4 m (rated value)		
	E3JK-R2□□	3 m	1	---
	E3JK-R4□□	5 m		
Small reflector	E3JK-R2□□	1 m (5 mm) *	1	---
Tape Reflector	E3JK-R2□□	750 mm (200 mm) *	1	The M.S.R. function is available.
	E3JK-R2□□	1.2 m (200 mm) *		
	E3JK-R2□□	1.5 m (200 mm) *		

* Values in parentheses indicate the minimum required distance between the sensor and reflector.

Note: When the reflector used is other than the supplied one, set the sensing distance to about 0.7 times of the typical example as a guideline.

Mounting Brackets

Shape	Model	Quantity	Remarks
	E39-L40	1	Supplied with E3JK

Note: If a through-beam model is used, order two Mounting Brackets for the emitter and receiver respectively.

Rating/Performance

E3JK

Sensor type		Through-beam	Retroreflective model (with M.S.R. function)		Retroreflective model (without M.S.R. function)		Diffuse-reflective	
Item	Model	E3JK-5M□	E3JK-R2M□	E3JK-R2□3	E3JK-R4M□	E3JK-R4S3	E3JK-DS30M□	E3JK-DS30S3
Sensing distance		5 m	2.5 m (When using the E39-R1)		4 m (When using the E39-R1)		300 mm (White paper 100x100 mm)	
Standard sensing object		Opaque 14.8 dia. min.	Opaque: 75 mm dia. min.				---	
Differential distance		---					20% max. of sensing distance	
Directional angle		Both emitter and receiver: 3°C to 20°C	1° to 5°				---	
Light source (wave length)		Infrared LED (950 nm)	Red LED (660 nm)				Infrared LED (950 nm)	
Power supply voltage		12 to 240 VDC ±10% ripple (p-p) : 10% max. 24 to 240 VAC ±10% 50/60 Hz						
Current consumption	DC	3 W max.	2 W max.					
	AC	3 W max.	2 W max.					
Control output		Relay output: 250VAC 3 A (cosφ=1) max., 5 VDC 10 mA min.	Relay output: 250VAC 3 A (cosφ=1) max., 5 VDC 10 mA min.	DC SSR Negative or positive common 48 VDC 100 mA max. Leak current 0.1 mA max. With load short-circuit protection	Relay output: 250VAC 3 A (cosφ=1) max., 5 VDC 10 mA min.	DC SSR Negative common 48 VDC 100 mA max. Leak current 0.1 mA max. With load short-circuit protection	Relay output: 250VAC 3 A (cosφ=1) max., 5 VDC 10 mA min.	DC SSR Negative common 48 VDC 100 mA max. Leak current 0.1 mA max. With load short-circuit protection
Life expectancy (relay output)	Me- chanical	50 million times or more (switching frequency 18,000 times/hour)						
	Electri- cal	100 thousand times or more (switching frequency 18,000 times/hour)						
Response time		30 ms max.	30 ms max.	5 ms max.	30 ms max.	5 ms max.	30 ms max.	5 ms max.
Sensitivity adjustment		---					Single-turn adjustment	
Ambient illuminance		Incandescent lamp: 3,000 lux max.						
Ambient temperature		Operating: -25°C to 55°C, Storage: -30°C to 70°C (with no icing or condensation)						
Ambient humidity		Operating: 45% to 85%RH, Storage: 35% to 95%RH (with no condensation)						
Insulation resistance		20 MΩ min. at 500 VDC						
Dielectric strength		1,500 VAC at 50/60 Hz for 1 minute						
Vibration resistance	Destruction	10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y, and Z directions						
	Mal-function	10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y, and Z directions						


Sensor type		Through-beam	Retroflective model (with M.S.R. function)		Retroflective model (without M.S.R. function)		Diffuse-reflective	
Item	Model	E3JK-5M□	E3JK-R2M□	E3JK-R2□3	E3JK-R4M□	E3JK-R4S3	E3JK-DS30M□	E3JK-DS30S3
Shock resistance	Destruction	Destruction: 500 m/s ² for 3 times each in X, Y, and Z directions						
	Mal-function	Destruction: 100 m/s ² (approx. 10G) 3 times each in X, Y, and Z directions	Destruction: 100 m/s ² (approx. 10G) 3 times each in X, Y, and Z directions	Destruction: 500 m/s ² for 3 times each in X, Y and Z directions	Destruction: 100 m/s ² (approx. 10G) 3 times each in X, Y, and Z directions	Destruction: 500 m/s ² for 3 times each in X, Y, and Z directions	Destruction: 100 m/s ² (approx. 10G) 3 times each in X, Y, and Z directions	Destruction: 500 m/s ² for 3 times each in X, Y, and Z directions
Protective structure		IEC60529 IP64						
Connection method		Pre-wired models (standard length: 2 m)						
Weight (Packed state)		Approx. 420 g	Approx. 250 g					
Material	Case	ABS						
	Lens	Acrylics						
	Mounting bracket	Steel						
Accessories		Mounting bracket (with screws), nuts, instruction manual, reflector (retroreflective model only)						

Characteristic data (typical)

Excess Gain Ratio vs. Setting Distance


Through-beam model

E3JK-5□□

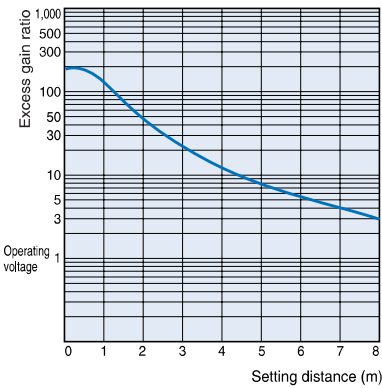


Retroreflective Models

E3JK-R2□□ + E39-R1 (supplied reflector)

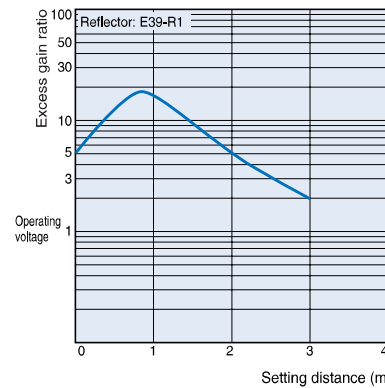


Diffuse-reflective

E3JK-DS30□□

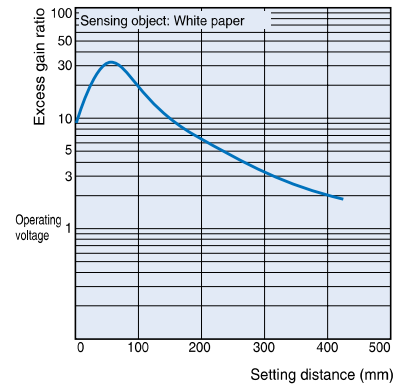

E3JK-R4□□ + E39-R1 (supplied reflector)

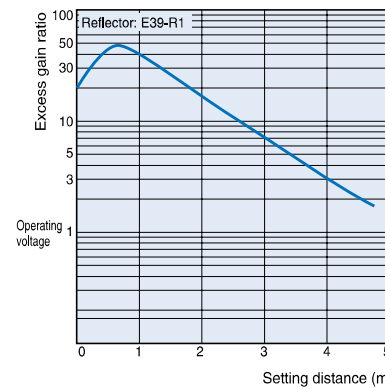

Output Circuit Diagram

E3JK

Relay output

Model	Timing chart	Output circuit
E3JK-5M1 E3JK-5M2 E3JK-R2M1 E3JK-R2M2 E3JK-R4M1 E3JK-R4M2 E3JK-DS30M1 E3JK-DS30M2	Incident Interrupted Light indicator (red) L-ON (Ta) (E3JK-□□M1) D-ON (Ta) (E3JK-□□M2)	24 to 240 VAC 12 to 240 VDC Power source (Polarity Optional) Brown Blue White Black Gray Tc Tb Ta Main circuit Built-in relay: G6C

DC transistor output

Model	Timing chart	Output circuit
E3JK-R2S3 E3JK-R4S3 E3JK-DS30S3	Incident Interrupted Light indicator (red) L-ON mode D-ON mode	24 to 240 VAC 12 to 240 VDC Power source Brown Blue White Black (L-ON) Gray (D-ON) Load Main circuit Drive circuit
E3JK-R2R3	Incident Interrupted Light indicator (red) L-ON mode D-ON mode	24 to 240 VAC 12 to 240 VDC Power source (Polarity Optional) Brown Blue Gray I1 Black I2 White Load 48 VDC max. I1 + I2 < 100 mA Main circuit Drive circuit Note: The output stage leakage currents are 0.1 mA max., respectively.

Note: Connect to brown and blue on the emitter side.

Operation

Adjustment

Model	Item	Through-beam	Retroreflective Models	Diffuse-reflective
E3JK		Swing the receiver and emitter vertically and/or horizontally and set the adjuster in the center of the range where the indicator of the receiver turns ON.	Like the through-beam model, adjust the reflector and emitter/receiver. Since the directional angle of the emitter/receiver is 1 to 5°, adjust the emitter/receiver especially carefully.	With sensing object Without sensing object Setting Operation (A) (A) Sensitivity MIN MAX (B) Operation (C) Reset (A) Sensitivity MIN MAX (A) Sensitivity MIN MAX (1) If you have a sensing object as shown in the figure, turn the sensitivity adjuster clockwise (increase the sensitivity) until the indicator is turned ON, and define this adjuster position as (A). (2) Remove the sensing object, turn the sensitivity adjuster clockwise until the indicator is turned ON by a background object, and define this position as (B). (3) Turn the sensitivity adjuster counterclockwise (decrease the sensitivity) from (B) until the indicator is turned OFF, and define this position as (C). (4) The position in the middle of (A) and (C) is the optimum position. If the indicator is not turned ON by the background object at the maximum sensitivity, set the adjuster in the middle of (A) and maximum sensitivity. The sensitivity adjuster may be damaged if an excessive force is applied.

Precautions

Correct Use

E3JK

Design

Power Reset Time

The Sensor is ready to detect an object within 200 ms after it is turned ON. If Sensor and load are connected to separate power supplies, ensure to turn ON the Sensor first.

Wiring Considerations

Connection/Wiring


If the DC transistor output type is used, the sum of load currents of L-ON output (NO) and D-ON output (NC) should be within 100 mA. If the sum of load currents exceeds 100 mA, the load short-circuit protection may be activated. (The load short-circuit protection is reset by turning OFF the power of the photoelectric sensor.)

Miscellaneous


Ambient Conditions (Installation Area)

The E3JK will malfunction if installed in the following places.

- Places where the E3JK is exposed to a dusty environment.
- Places where corrosive gases are produced.

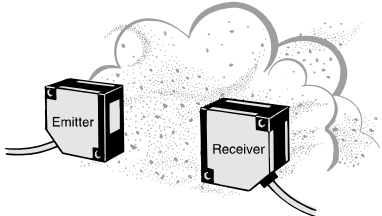


- Places where the E3JK is directly exposed to water, oil, or chemicals.



Dimensions (Unit: mm)

Sensors


E3JK-5□□

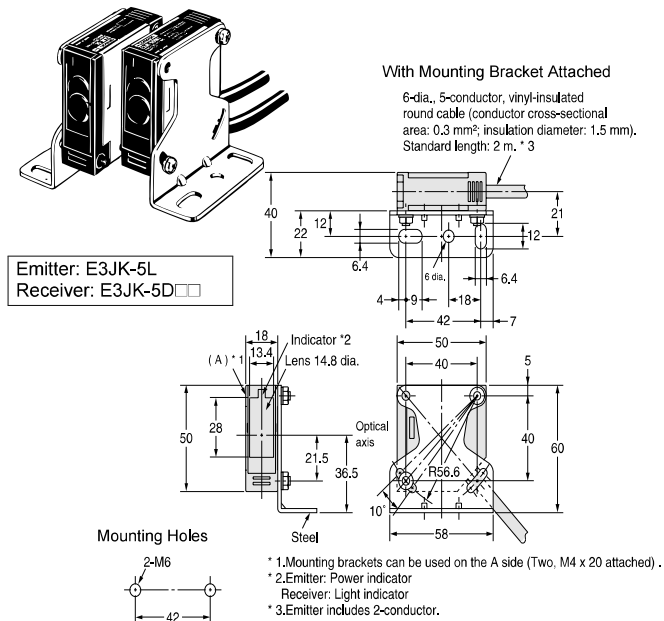

E3JK-R2□□

E3JK-R4□□

E3JK-DS30□□

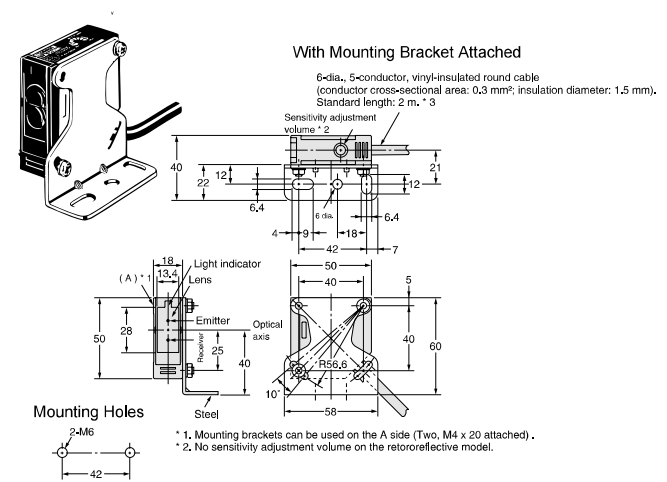


Accessories (Order Separately)

Seal type long slit (for E3JK)

E39-S39

Material: Polyester
0.1 mm thick



ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

