

Sensor, Series ST6

► 6 mm groove ► with cable ► without wire end ferrule, tin-plated, 3-pin, without wire end ferrule, tin-plated, 2-pin



00112027_2

Ambient temperature min./max.	-25°C / +70°C
Protection class	IP69K
Switching point precision [mm]	±0,1
Switching capacity	3 W / 3 VA
Vibration resistance	10 - 55 Hz, 1 mm
Shock resistance	30 g / 11 ms

Materials:

Housing	Polyamide
Cable sheath	Polyurethane

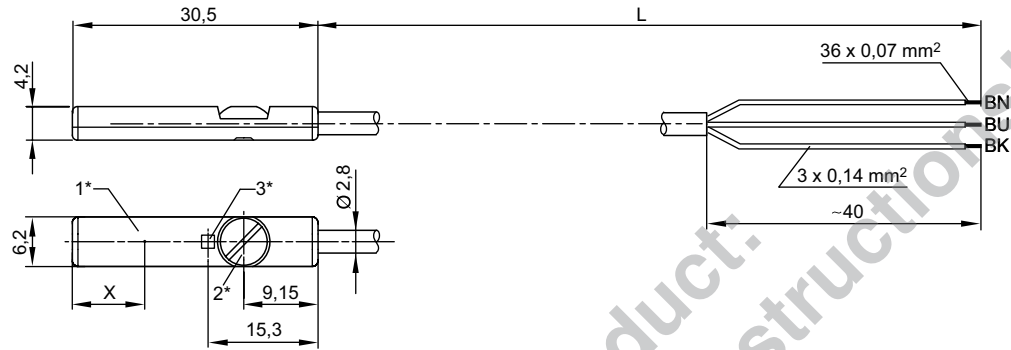
	Type of contact	Cable length	DC operating voltage min./max.	Operational voltage AC min./max.	Voltage drop U at I _{max}	DC switching current, max.	Part No.
		[m]	[V]	[V]	[V]	[A]	
	Reed	3	10 / 30	10 / 30	I*Rs	0,13	0830100629
		5					0830100630
		10					R412004575
	electronic PNP	3	10 / 30	-	≤ 2,5	0.1	0830100631
		5					0830100632
		10					R412004576
	electronic NPN	3	10 / 30	-	≤ 2,5	0.1	0830100633
		5					0830100634
	Reed	3	10 / 110	10 / 110	I*Rs	0,13	R412007815
	electronic PNP	1.4	10 / 30	-	≤ 2,5	0.1	0830100635

Part No.	AC switching current, max.	Protective resistor for reed	Max. switching frequency	Operating current, not switched	Operating current, switched	LED	Note
	[A]	[Ω]	[kHz]	[mA]	[mA]		
0830100629 0830100630 R412004575	0,13	15	< 0,3	-	< 10 mA	Yellow	1); 3); 5)
0830100631 0830100632 R412004576	-	-	< 1,0	< 20 mA	< 30 mA	Yellow	1); 4); 5)
0830100633 0830100634	-	-	< 1,0	< 20 mA	< 30 mA	Yellow	1); 4); 5)
R412007815	0,13	-	< 0,3	-	< 10 mA	Yellow	2); 3)
0830100635	-	-	< 0,1	< 20 mA	< 30 mA	Yellow	1); 3); 5)

- 1) interfaces: without wire end ferrule, tin-plated; 3-pin
- 2) interfaces: without wire end ferrule, tin-plated; 2-pin
- 3) Protected against polarity reversal
- 4) short circuit resistant / Protected against polarity reversal
- 5) UL (Underwriters Laboratories)

Sensor, Series ST6

► 6 mm groove ► with cable ► without wire end ferrule, tin-plated, 3-pin, without wire end ferrule, tin-plated, 2-pin

Dimensions


00111942_b

1* = switching point 2* = clamping screw 3* = LED

L = cable length

BN = brown, BK = black, BU = blue

X = electronic: 6 mm, Reed: 10 mm