


Coil, Series CO1

- form A
- Power consumption,DC 2.1-6.2 W
- Holding power,AC 4.2-8 VA
- Switch-on power,AC 6.9-11.5 VA



Connector standard	EN 175301-803, form A
electrical connections	Plug, 3-pin
Ambient temperature min./max.	122 °F
Protection class,With valve plug connector/plug	IP65
Duty cycle ED	100 %
Weight	See table below

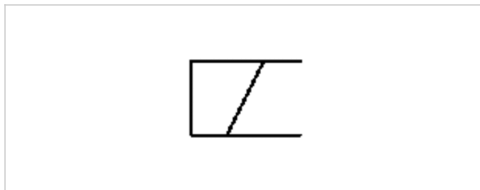

Technical data

Part No.	Operationalvoltage	Operationalvoltage	Operationalvoltage	Voltage tolerance
	DC	AC 50 Hz	AC 60 Hz	DC
5420507012	12 V	-	-	-10% / +10%
5420507022	24 V	-	-	-10% / +10%
5428457022	-	24 V	24 V	-
5420507032	48 V	-	-	-10% / +10%
5428457072	-	110 V	110 V	-
5428457112	-	240 V	240 V	-
5420897022	24 V	-	-	-10% / +10%
5428117022	-	24 V	24 V	-
5428117072	-	110 V	110 V	-
5428117082	-	230 V	230 V	-
1824210222	12 V	24 V	24 V	-10% / +10%
1824210223	24 V	-	-	-10% / +10%
1824210221	-	110 V	110 V	-
1824210220	110 V	220 V	230 V	-10% / +10%

Part No.	Voltage tolerance	Voltage tolerance	Power consumption	Holding power
	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz
5420507012	-	-	2.1 W	-
5420507022	-	-	2.1 W	-
5428457022	-20% / +10%	-10% / +20%	-	4.2 VA
5420507032	-	-	2.2 W	-

Part No.	Voltage tolerance	Voltage tolerance	Power consumption	Holding power
	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz
5428457072	-20% / +10%	-10% / +20%	-	4.2 VA
5428457112	-20% / +10%	-10% / +20%	-	4.2 VA
5420897022	-	-	2.7 W	-
5428117022	-20% / +10%	-10% / +20%	-	5.2 VA
5428117072	-20% / +10%	-10% / +20%	-	4.8 VA
5428117082	-20% / +10%	-10% / +20%	-	5.6 VA
1824210222	-10% / +10%	-10% / +10%	6.2 W	7.4 VA
1824210223	-10% / +10%	-10% / +10%	4.4 W	-
1824210221	-10% / +10%	-10% / +10%	-	8 VA
1824210220	-10% / +10%	-10% / +10%	6 W	8 VA

Part No.	Holding power	Switch-on power	Switch-on power	Compatibility index	Weight
	AC 60 Hz	AC 50 Hz	AC 60 Hz		
5420507012	-	-	-	13	0.212 lbs
5420507022	-	-	-	13	0.212 lbs
5428457022	3.2 VA	6.9 VA	5.6 VA	13	0.212 lbs
5420507032	-	-	-	13	0.212 lbs
5428457072	3.2 VA	6.9 VA	5.8 VA	13	0.212 lbs
5428457112	3.2 VA	6.9 VA	5.8 VA	13	0.212 lbs
5420897022	-	-	-	14	0.212 lbs
5428117022	3.9 VA	-	-	14	0.212 lbs
5428117072	3.6 VA	-	-	14	0.212 lbs
5428117082	4.2 VA	-	-	14	0.212 lbs
1824210222	5.2 VA	11.5 VA	9.5 VA	15	0.242 lbs
1824210223	-	-	-	15	0.242 lbs
1824210221	6.4 VA	11.5 VA	10.8 VA	15	0.242 lbs
1824210220	9.1 VA	11.5 VA	12.6 VA	15	0.242 lbs

Technical information

Material

Housing	Thermoplastic elastomer
---------	-------------------------

Dimensions

Dimensions

