


**PET PANEL**

PANNELLO IN PET
PANEL DE PET
PANNEAU EN PET
PLATTE AUS PET

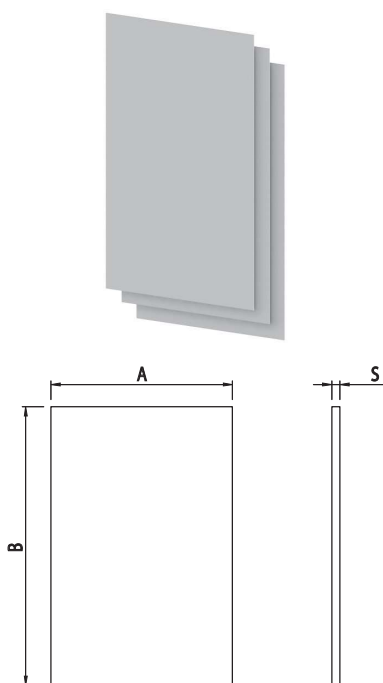


Cod	Color	S	AxB	Kg/m ²
084.538.001	Trasparent	1 mm	2050 x 3050	1,35
084.538.002	Opal	1 mm	2050 x 3050	1,35

Shockproof and Fire classification B-s1, d0

Resistente agli urti e classificato al fuoco in classe B-s1, d0
Resistente a los golpes y con reacción al fuego de clase B-s1, d0
Résistant aux chocs et résistance au feu classée B-s1, d0
Stoßfest und in Baustoffklasse B-s1, d0 eingestuft (Brandverhalten)

POLYCARBONATE PANEL

PANNELLO IN POLICARBONATO
PANEL DE POLICARBONATO
PANNEAU EN POLYCARBONATE
PLATTE AUS POLYCARBONAT

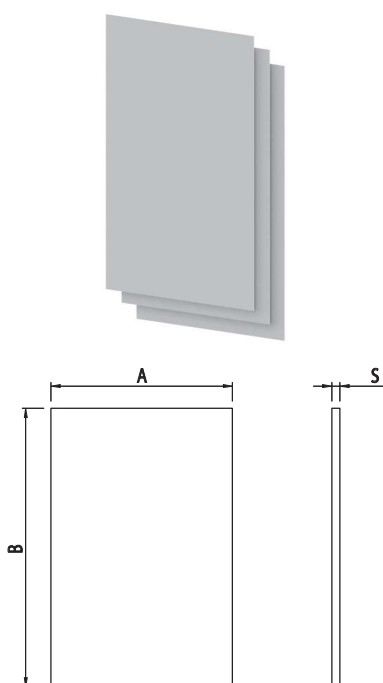

Cod	Color	S	AxB	Kg/m ²
030LEX	Trasparent	3 mm	2050 x 3050	3,6
031LEX	Trasparent	4 mm	2050 x 3050	4,8
032LEX	Trasparent	5 mm	2050 x 3050	6
034LEX	Trasparent	8 mm	2050 x 3050	9,6
035LEX	Trasparent	10 mm	2050 x 3050	12

Shockproof and weather resistant (-40°C/+120°C)

Resistente agli urti ed agli agenti atmosferici (-40°C/+120°C)
Antichoque y resistente a la intemperie (-40°C/+120°C)
Antichoc et résistant aux intempéries (-40°C/+120°C)
Anti-Stoß und witterungsbeständig (-40°C/+120°C)